






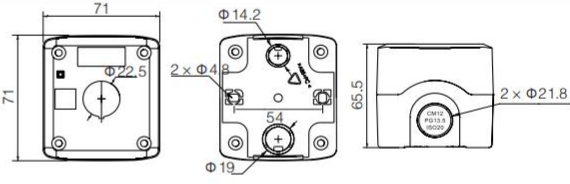
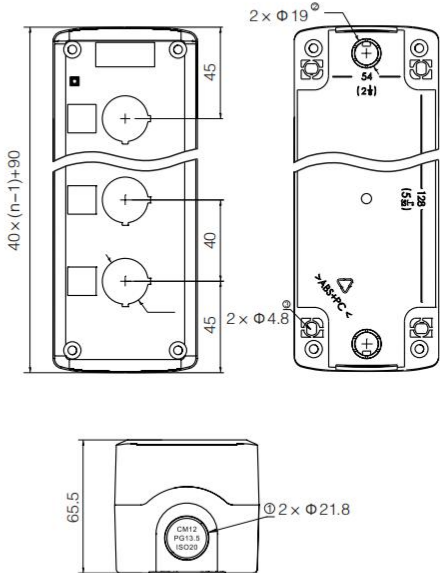



QCX2 磁力起动器 Magmetic starters



产品型号 Type			QCX2-09	QCX2-12	QCX2-18	QCX2-25	QCX2-32	QCX2-40	QCX2-50	QCX2-63	QCX2-80	QCX2-95
额定绝缘电压 Rated insulating voltage(Ui)			690	690	690	690	690	690	690	690	690	690
额定工作电流 (Ie)(A)		380V	8.5	11.5	15.5	22	30	37	44	60	72.5	85
Rated oprating current AC3 Ue ≤ 440V		660V	6.6	8.9	12	18	21.3	34.6	39	42	49	49
约定发热电流 (Ith) Conventional heating current AC10 ≤ 40°		380V	25	25	32	40	50	60	80	80	125	125
可控三相鼠笼电动机功率 Power of controllable 3-phase squirrel-cage moter(AC3) KW		220V	2.2	3	4	5.5	7.5	11	15	18.5	22	25
		380V	4	5.5	7.5	11	15	18.5	22	30	37	45
		660V	5.5	7.5	10	15	18.5	30	33	37	45	55
寿命 Life	机械寿命 Mechanical life 104 次		600	600	600	600	600	600	600	600	600	600
	电寿命 Electric life 104 次		100	100	80	80	80	60	60	60	60	60
辅助触头 Auxiliary contactor block	约定发热电流 (Ith) Conventional heating current		6	6	6	6	6	6	6	6	6	6
	控制功率 Control power	AX-11VA	300	300	300	300	300	300	300	300	300	300
		DC-11W	30	30	30	30	BO	30	30	30	30	30
体积 volume H×L×W(mm ³) 			166×140×90	166×140×90	166×140×90	166×140×104	166×140×104	315×170×185	315×170×185	315×170×185	315×170×185	315×170×185

按钮瞬时 Pushbuttons Momentary

相片 Photo	技术参数 Technical parameters	电气原理图 Electrical schematic	尺寸 Diimension
 TBS-211B	动力用押扣按钮开关 BS Pushbutton switch Ue:AC 380V Ui:500V Ie:4A 1.5KW		
 TBS-216B	动力用押扣按钮开关 BS Pushbutton switch Ue:AC 380V Ui:500V Ie:6A 2.2KW		
 TBS-230B	动力用押扣按钮开关 BS Pushbutton switch Ue:AC 380V Ui:500V Ie: 10A 3.7KW		

样式 Photo	描述 Description	型号 Type	尺寸 Contour
 深灰上盖白色底座 Dark grey cover with white base	 黄色上盖白色底座 Yellow cover with white base	一孔按钮盒 Button box for single hole IP65 一孔按钮盒 Button box for single hole IP65	GOB-1A-GW GOB-1A-YW  ① 2Φ21.8mm 敲落孔, 最佳线径 6-12mm ② Φ19mm 敲落孔, 底部进线 ③ Φ14.3mm 敲落孔, 底部进线 ④ 2Φ4.8mm 安装孔
	二孔按钮盒 Button box for two hole IP65	GOB-2A-GW	 ① 2Φ21.8mm 敲落孔, 最佳线径 6-12mm ② 2Φ19mm 敲落孔, 底部进线 ③ 2Φ4.8mm 安装孔 ④ n: 孔数
	三孔按钮盒 Button box for three hole IP65	GOB-3A-YW	
	四孔按钮盒 Button box for four hole IP65	GOB-4A-GW	
	五孔按钮盒 Button box for five hole IP65	GOB-5A-YW	
	六孔按钮盒 Button box for six hole IP65	GOB-6A-GW	
 一孔按钮盒 Button box for single hole	带防水接头 With waterproof connector 带加长型防水接头 With extended waterproof connector	GOB-1A-GW/P GOB-1A-YW/H	

型号命名方式解释 Explanation of Type Designation

示例 Example

GOB - 1 A 0 1M - YW / P
 ↓ ↓ ↓ ↓ ↓ ↓
 ① ② ③ ④ ⑤ ⑥

①: 按钮盒系列 Button box series

②: 孔数 The number of holes

③: 按钮盒款式 Button box styles







④: 按钮符号代码 Button symbol code




⑤: Y: 代表黄色上盖; G: 代表深灰色上盖; W: 代表白色底座

Y: in it denotes yellow cover; G: in it denotes dark grey cover; W: in it denotes white base

⑥: 电缆接头类型 Gable gland styles

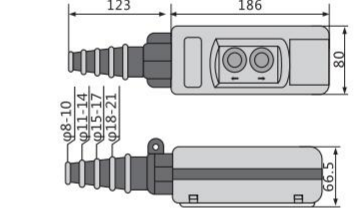
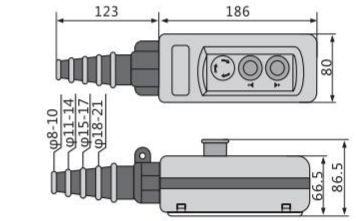
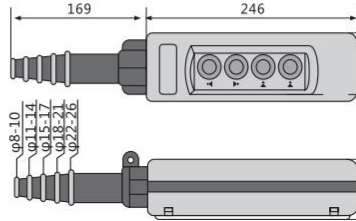
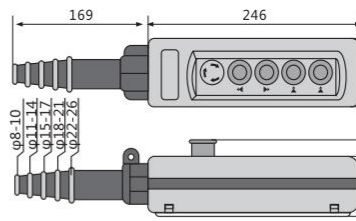
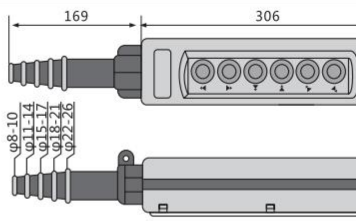
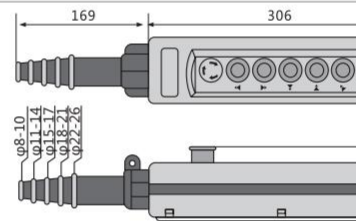
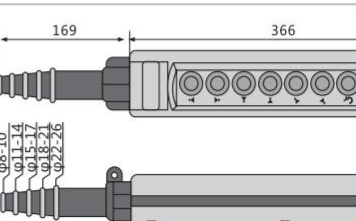


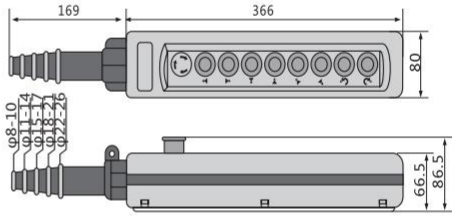
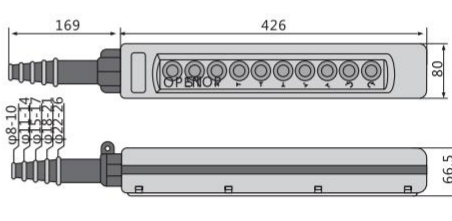
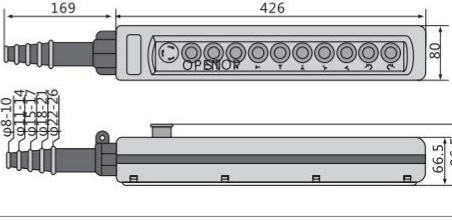
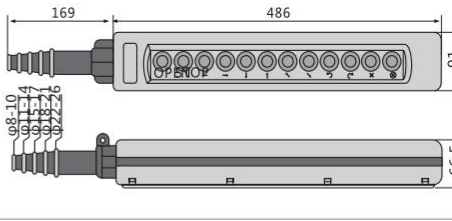
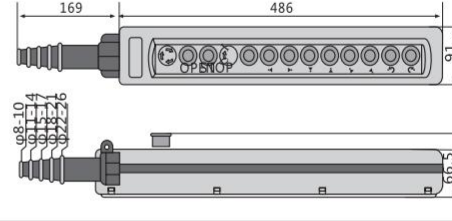


样式 Photo	描述 Description	型号 Type	尺寸 Contour
	1 红色复位按钮 1 red flush pushbutton spring return IP65	 GOB-1A11M-GW  GOB-1A12-GW  GOB-1A13-GW  GOB-1A11-GW	
	1 二位自锁定旋钮 1 selector switch 2-position stay put standard IP65	 GOB-1A21M-GW  GOB-1A22-GW  GOB-1A20-GW	
	1 红色蘑菇头复位按钮 1 red mushroom head pushbutton spring return IP65	 GOB-1A60M-GW  GOB-1A60-GW	
	可旋转复位和拉拔复位急停按钮 1 red mushroom head pushbutton turn to release or push-pull IP65	 GOB-1A70M-YW  GOB-1A70-YW	
	可旋转复位和拉拔复位急停按钮 1 red mushroom head pushbutton turn to release or push-pull IP65	 GOB-1A71M-YW  GOB-1A71-YW	
	1 二位自锁定钥匙钮 1 selector switch with key operated 2-position stay put IP65	 GOB-1A42M-GW  GOB-1A42-GW	

样式 Photo	描述 Description	型号 Type	尺寸 Contour
	1 绿色复位平钮 1 红色复位平钮 2 spring return pushbuttons 1 flush green 1 flush red IP65	 	
		 	
		 	
		 	
	1 红色指示灯 1 红色复位平钮 1 绿色复位平钮 2 spring return pushbuttons 1 flush green 1 flush red IP65	  	
		  	
		  	
		  	
	1 红色复位平钮 2 黑色复位平钮 (白箭头) 3 spring return pushbuttons 1 flush red 2 flush black white arrow IP65	  	
		  	

防水盒系列 Waterproof box series

产品样式	外形尺寸 mm 宽 W×长 L×高 H	型号
	50×65×55	AG-050605
	65×95×55	AG-060905
	80×110×70	AG-081107
	80×110×85	AG-081108
	80×130×70	AG-081307
	80×130×85	AG-081308
	80×180×70	AG-081807
	80×250×70	AG-082507
	80×250×85	AG-082508
	100×100×75	AG-101007
	100×100×90	AG-101009
	125×125×75	AG-121207
	125×125×90	AG-121209
	125×175×75	AG-121707
	125×175×100	AG-121710
	140×170×95	AG-141709
	150×200×100	AG-152010
	150×200×130	AG-152013
	150×250×100	AG-152510
	150×250×130	AG-152513
	175×175×100	AG-171710
	190×280×130	AG-192813
	200×200×95	AG-202009
	200×200×130	AG-202013

样式 Photo	描述 Description		型号 Type	尺寸 Contour
	两钮联锁、自动复位，常开动和按钮 Two-button interlock, automatic reset, (two on)	Ui:500V Ith:10A AC-15 500V-2A 250V-5A	GOB1-X271 GOB1-X281 GOB1-X291	
	推锁旋转紧急停止按钮 两钮联锁、自动复位 Push lock revolve urgent stop button; one off (one off two on)	Ui:500V Ith:10A AC-15 500V-2A 250V-5A	GOB1-X2713 GOB1-X2813 GOB1-X2913	
	两钮联锁、自动复位，常开动合按钮 Two-button interlock, automatic reset, (four on)	Ui:500V Ith:10A AC-15 500V-2A 250V-5A	GOB1-X471 GOB1-X481 GOB1-X491	
	推锁旋转紧急停止按钮 两钮联锁，自动复位 Push lock revolve urgent stop button; one off (one off four on)	Ui:500V Ith:10A AC-15 500V-2A 250V-5A	GOB1-X4713 GOB1-X4813 GOB1-X4913	
	两钮联锁，自动复位，常开动合按钮 Two-button interlock, automatic reset, (six on)	Ui:500V Ith:10A AC-15 500V-2A 250V-5A	GOB1-X671 GOB1-X681 GOB1-X691	
	推锁旋转紧急停止按钮 两钮联锁、自动复位 Push lock revolve urgent stop button; one off (one off six on)	Ui:500V Ith:10A AC-15 500V-2A 250V-5A	GOB1-X6713 GOB1-X6813 GOB1-X6913	
	两钮联锁，自动复位 常开动合按钮 Two-button interlock, automatic reset, (eight on)	Ui:500V Ith:10A AC-15 500V-2A 250V-5A	GOB1-X871 GOB1-X881 GOB1-X891	

样式 Photo	描述 Description	型号 Type	尺寸 Contour
	推锁旋转紧急停止按钮，两钮联锁，自动复位 Push lock revolve urgent stop button; one off (one off eight on)	Ui:500V Ith:10A AC-15 500V-2A 250V-5A	
	两钮联锁，自动复位，常开动合按钮 Two-button interlock, automatic reset, (nine on)	Ui:500V Ith:10A AC-15 500V-2A 250V-5A	
	推锁旋转紧急停止按钮，两钮联锁，自动复位 Push lock revolve urgent stop button; one off (one off nine on)	Ui:500V Ith:10A AC-15 500V-2A 250V-5A	
	两钮联锁，自动复位，常开动合按钮 Two-button interlock, automatic reset, (eleven on)	Ui:500V Ith:10A AC-15 500V-2A 250V-5A	
	推锁旋转紧急停止按钮，两钮联锁，自动复位 Push lock revolve urgent stop button; one off (one off eleven on)	Ui:500V Ith:10A AC-15 500V-2A 250V-5A	
	两钮联锁，自动复位 Buttons inter lock and auto reset	Ui:500V Ith:10A AC-15 500V-2A 250V-5A	
	两钮联锁，自动复位 Buttons inter lock and auto reset	Ui:500V Ith:10A AC-15 500V-2A 250V-5A	

样式 Photo	描述 Description	型号 Type	尺寸 Contour
	两钮联锁，自动复位 Buttons inter lock and auto reset	Ui:500V Ith:5A AC-15 500V~2A 250V~5A	GOB2-63 GOB2-62B
	两钮联锁，自动复位 Buttons inter lock and auto reset	Ui:500V Ith:5A AC-15 500V~2A 250V~5A	GOB2-64 GOB2-63B
	两钮联锁，自动复位 Buttons inter lock and auto reset	Ui:500V Ith:5A AC-15 500V~2A 250V~5A	GOB2-65 GOB2-64B
	ON(开) 常开自锁 由 OFF 驱动复位 两钮联锁、自动复位 Normal-on and self-lock reset is driven by off Two buttons inter lock self-reset,two couples normal-on-off	Ui:500V Ith:5A AC-15 500V~2A 250V~5A	GOB2-61A
	ON(开) 常开自锁 由 OFF 驱动复位 两钮联锁、自动复位 Normal-on and self-lock reset is driven by off Two buttons inter lock self-reset,two couples normal-on-off	Ui:500V Ith:5A AC-15 500V~2A 250V~5A	GOB2-62A
	推锁旋转紧急停止按钮，两钮联锁，自动复位 Push lock revolve urgent stopbutton; one off(one off one on)	Ui:500V~ Ith:10A AC-15 500V~2A 250V~5A	GOB2-61E GOB2-61ES GOB2-61EK GOB2-61ESK
	带电容防雨型按钮，两钮联锁，自动复位 Push lock revolve, with capacitor,two ON button, 16uf,30uf,40uf,50uf, others according to customer's requirement	Ui:500V~ Ith:10A AC-15 500V~2A 250V~5A	GOB2-61DR